



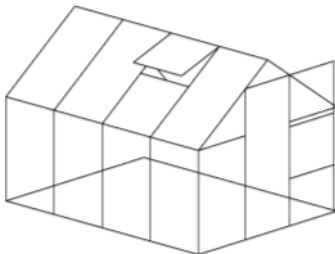

Titan 79 EB Greenhouse Assembly Instructions

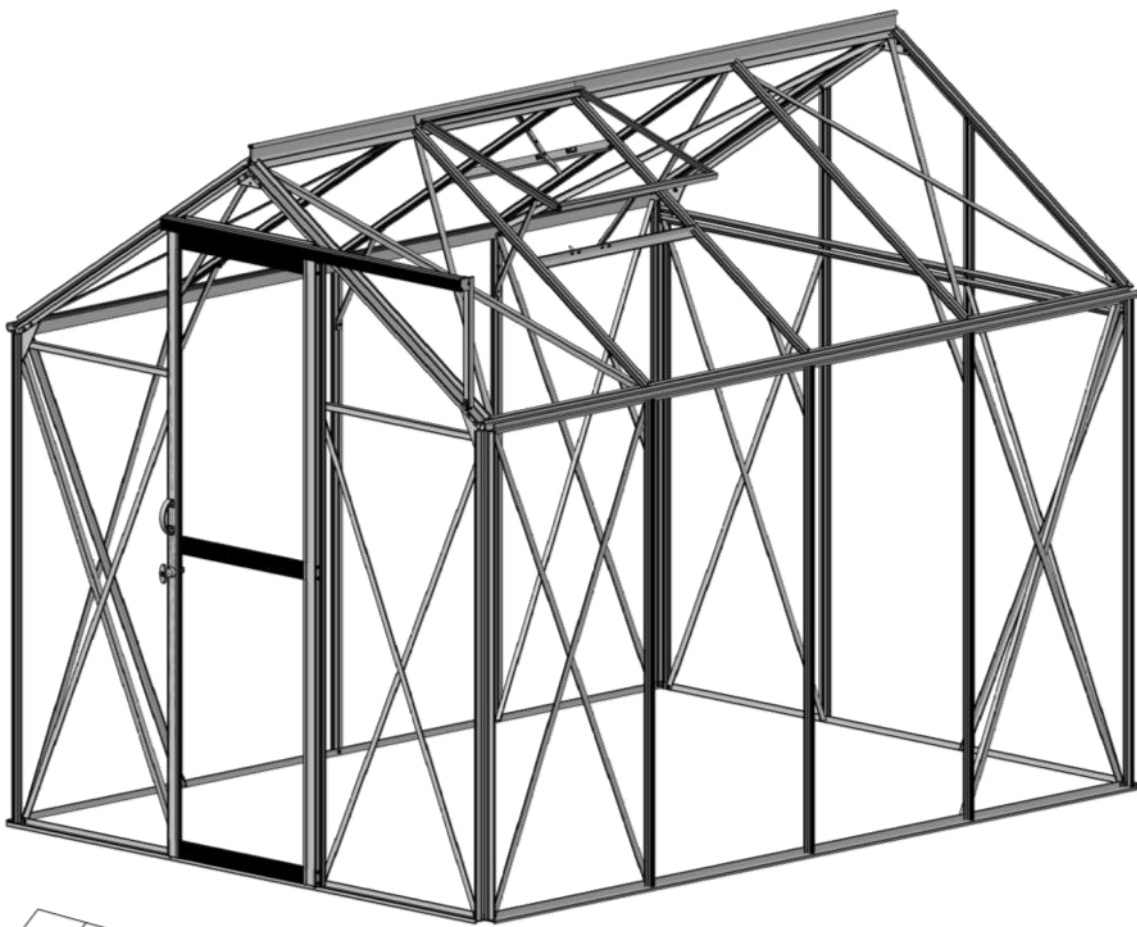

Model Titan 79 EB

Hunkin Garden Products Ltd
sales@hunkin.co.nz www.hunkin.co.nz
Ph 0800 14 48 65

Dear Customer!

Thank you for purchasing one of our greenhouses. We feel sure that by following the detailed assembly instructions, you will find as much pleasure in constructing the greenhouse as you will enjoy growing plants in it. The assembly instructions are a combination of text and illustrations and no technical knowledge is required for the erection of the greenhouse. The frames are numbered and packed separately corresponding to the pages in the assembly instructions.

Assemble one section at a time. Bolts and various fittings for each section are included with each pack. Each pack has a specified list of components.

We have attempted to make the greenhouse as strong as practicable but it still requires protection from strong winds. The best shelter is a semi permeable one where the wind is filtered but not completely stopped. Beware of situating your greenhouse between solid objects as they tend to funnel the wind. A sheltered greenhouse will be much more efficient at retaining heat.

Guarantee

□ There is a 10 year guarantee that covers replacement or repairs of defective frame parts due to material or a manufacturing fault. The guarantee is limited to replacement of the faulty parts and does not cover assembly costs, post and packaging or freight etc. The polycarbonate has a 7 year guarantee. Should a fault with the polycarbonate arise it is replaced on a pro-rata basis. This means for example if the polycarbonate was to fail in 3.5 years we would replace half of it free of charge, the customer is charged for the other half. The guarantee is invalid if the greenhouse is not assembled according to these instructions. The guarantee does not cover wind, snow and storm damage or other natural disasters.

Winter Protection

Our greenhouses are constructed with frame dimensions up to 50% stronger than competing products. We still recommend you protect your greenhouse during the winter if you are expecting heavy snow or high winds.

- Support the roof ridge at the centre of the greenhouse if expecting heavy snow.
- Don't let snow build up on the roof.
- Site your greenhouse so snow can't fall from trees or nearby roofs onto your greenhouse.
- Lock the door and windows to prevent wind damaging the greenhouse.

Foundation

The base is included with the greenhouse. All bases are powder coated to protect them from ground salt corrosion even if your greenhouse is mill finish. The base is maintenance free and, of course, all fittings are included. Remember to order concrete as this is not included in the kitset. Premixed bags of standard concrete or rapid set (just add water) are available at your local hardware store.

Maintenance


- Grease doors, hinges and door track.
- Clean the gutter for leaves etc.
- Check adjustment of windows.
- Replace any damaged polycarbonate.
- Wash the polycarbonate with a warm soapy solution. Do not use solvents.
- Clean the greenhouse with disinfectant before and after the growing season.

We endeavour to supply a quality product, however should you encounter a problem please contact Hunkin Garden Products Ltd either by email hunkin-garden@xnet.co.nz or by free phone 0800 14 48 65. To help identify the problem please refer to the assembly instructions and the list of components.

Caution



Peel back approximately 2 inches (50mm) of film from both sides before installing. Remove all film immediately after the construction is completed. Mark the sheets with a permanent felt tip pen to indicate the correct side to the




The UV-protected side of the sheet is printed and must face towards the sun. The side with the clear film goes to the inside. Remove all film.



Please put on gloves to avoid cutting your hands.



Treat the polycarbonate carefully so it is not bent or damaged.



Keep the polycarbonate away from material that could scratch it. Don't put the edges on the ground.

Important

- The base must be fastened to the ground using concrete around the pegs.
- The greenhouse must be securely fastened to the base.
- The base must be 100% level and square. The easiest way to ensure that the base is square is to measure across the diagonals. The diagonals should measure the same.
- We recommend greasing self tapping screws for easier assembly.
- Glazing should only be carried out in fairly calm weather.
- Make sure that the greenhouse is square before starting to glaze.
- We recommend using gloves while glazing.
- An assistant will make the job much easier.


Tools

The greenhouse is assembled by means of the following tools:



- Spirit level
- Spanner/socket spanner 8 and 10 mm
- Screw driver (a battery drill with a clutch is very handy for quicker assembly)
- Caulking gun

Base


The base is powder coated green. This protects the base from ground salts and makes it far more durable when in ground contact.

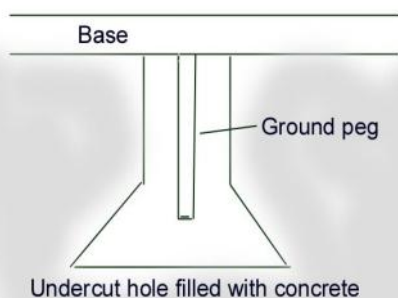

Dig a hole a minimum depth of 300mm or until you reach hard clay with a spade and give it some undercut before concreting the base pegs in. The pegs must be concreted into hard ground, not loose fill.

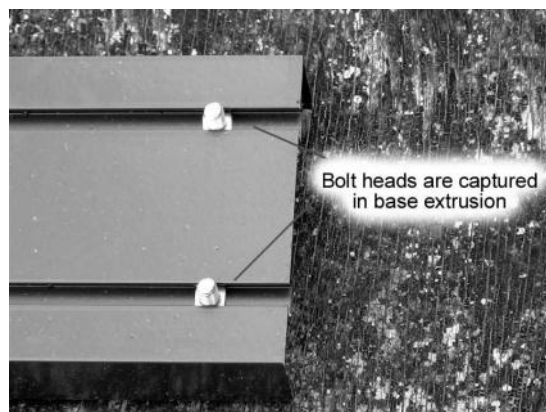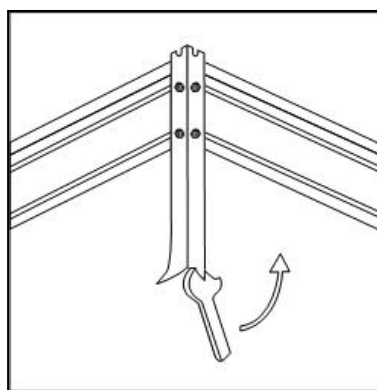

Assemble the base on the ground and square it up by measuring across the diagonals. Mark the position of the pegs on the ground and remove the base. Dig 300mm deep holes at the marked peg positions with a spade. You will have to go deeper if the ground is not solid. Some undercut in the bottom of the hole is recommended. Put the base back over the holes. Once level and square fill the holes with concrete and leave undisturbed for at least 3 days, longer if it is cold.

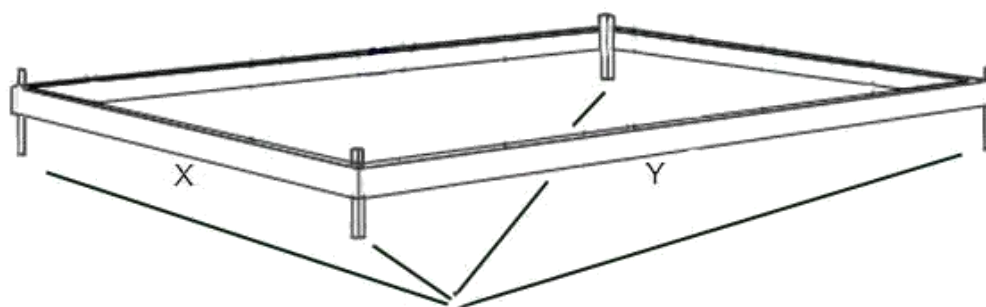















Concrete in all the ground pegs.











| | X | Y |
|----------|--------|--------|
| Titan 79 | 2097mm | 2859mm |

| | X | Y |
|----------|-------|------|
| Titan 79 | 6'11" | 9'5" |

Front gable (view from inside looking out)

Package No.1












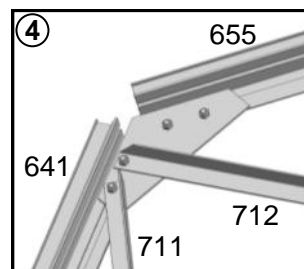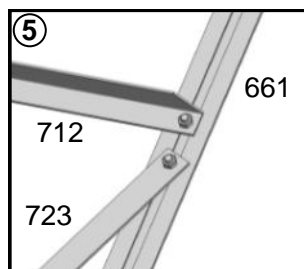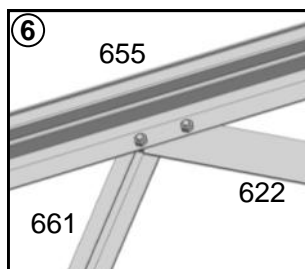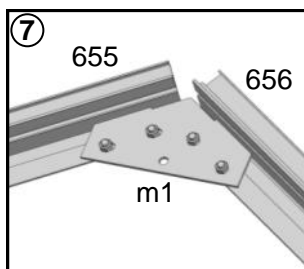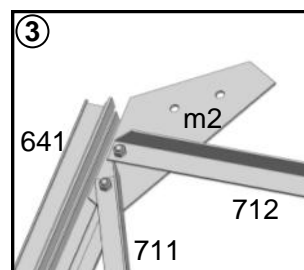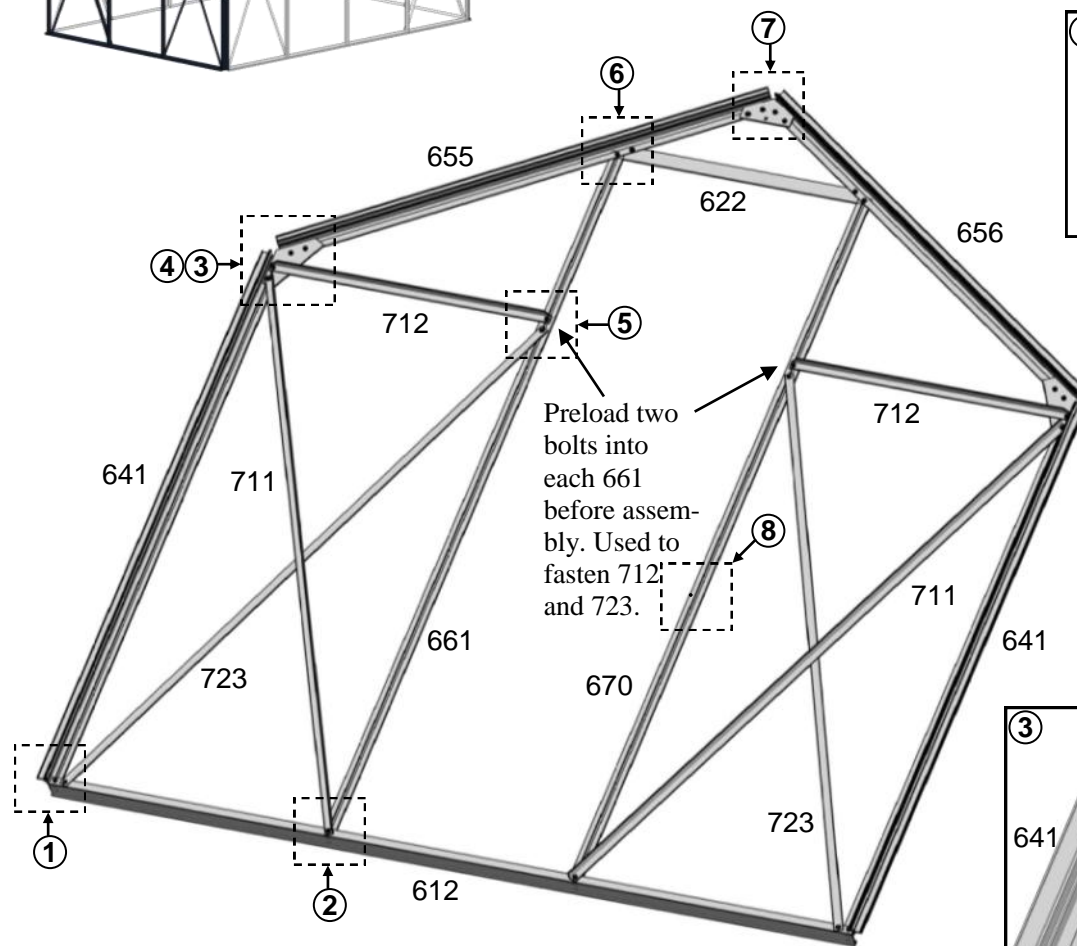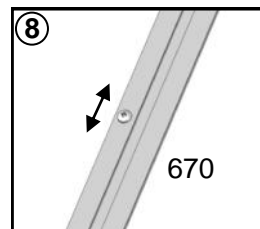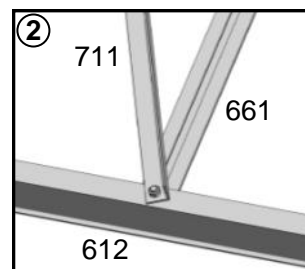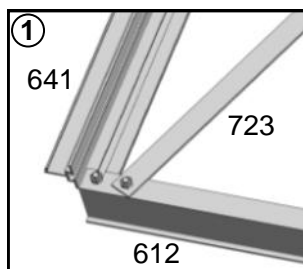
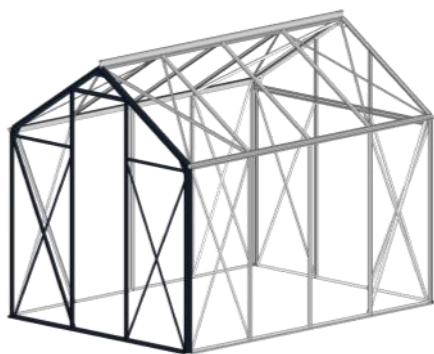
| 1 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|-----|---|---|---|---|---|---|---|---|--|---|---|---|---|---|
| # | 612 | 622 | 641 | 655 | 656 | 661 | 670 | 711 | 712 | 723 | a1 | a2 | m1 | m2 |
| mm | 2038 | 656 | 1535 | 1198 | 1198 | 1995 | 1995 | 1634 | 710 | 1623 | M6x10 | M6 | - | - |
| QTY | 1 | 1 | 2 | 1 | 1 | 1 | 1 | 2 | 2 | 2 | 26 | 26 | 1 | 2 |







5






Rear gable (view from inside looking out)

Package No.2

| | | | | | | | | | | | | | | |
|-----|---|---|---|---|---|---|---|---|--|---|---|---|---|----|
| 2 |  |  |  |  |  |  |  |  |  |  |  |  |  | |
| # | 633 | 641 | 657 | 658 | 663 | 664 | 782 | 711 | 723 | a1 | a2 | a3 | m1 | m2 |
| mm | 2038 | 1535 | 1198 | 1198 | 2009 | 2009 | 2036 | 1634 | 1623 | M6x10 | M6 | M6x15 | - | - |
| QTY | 1 | 2 | 1 | 1 | 1 | 1 | 2 | 2 | 2 | 22 | 24 | 2 | 1 | 2 |

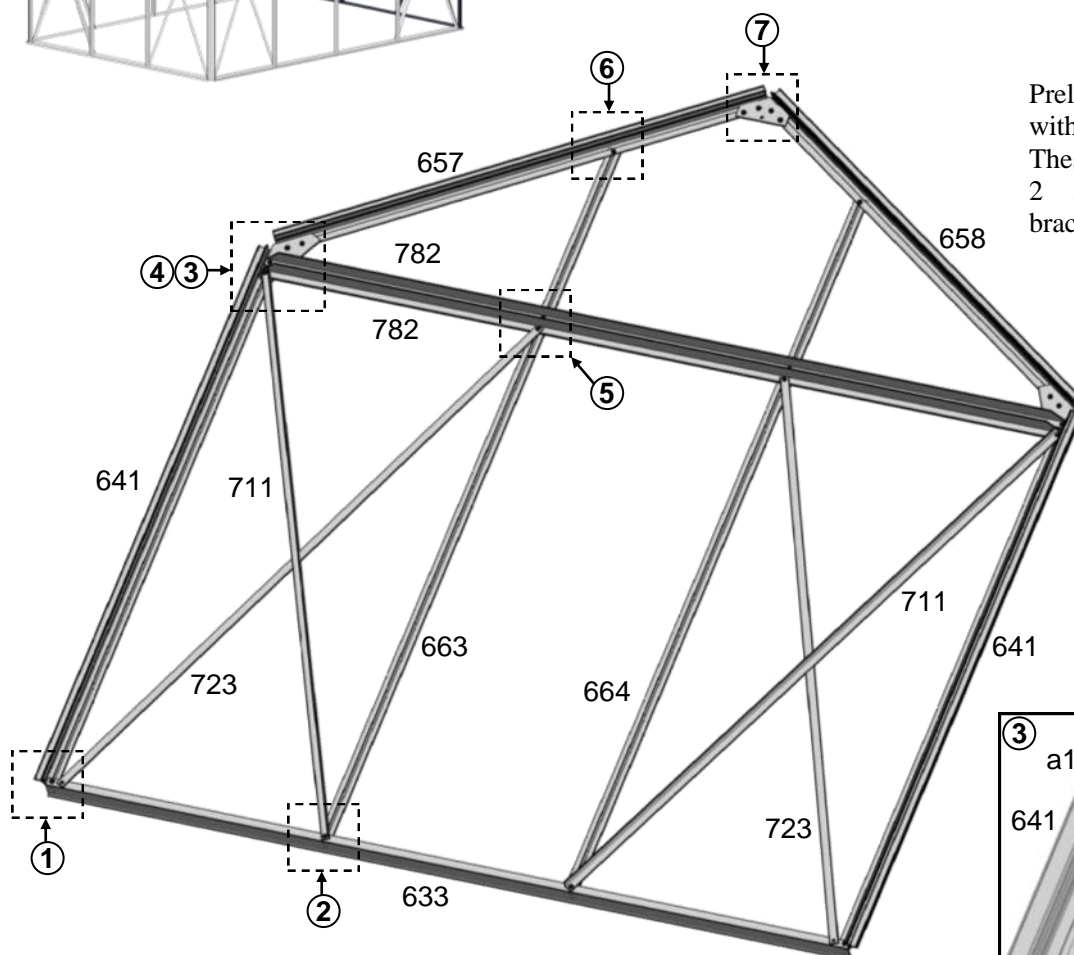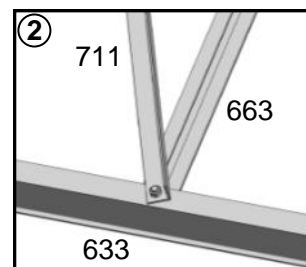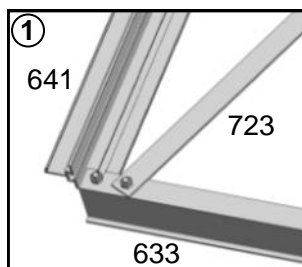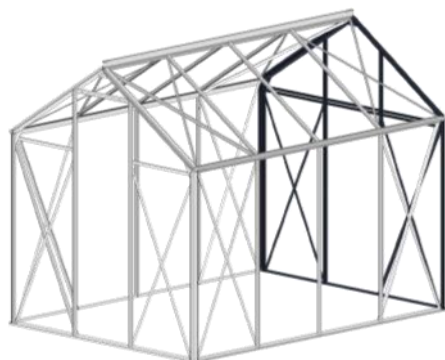


Preload 663 and 664 with two bolts .
These are used to fasten 2 x 782 horizontal braces.

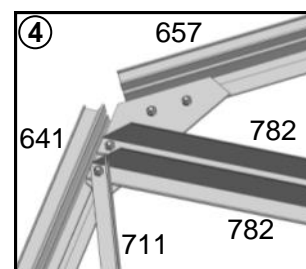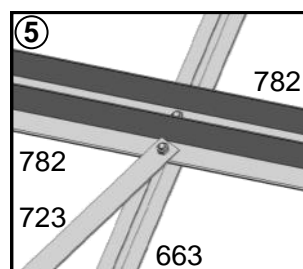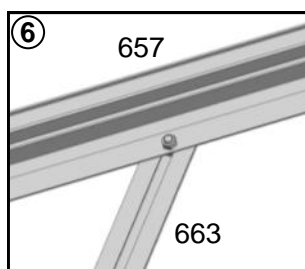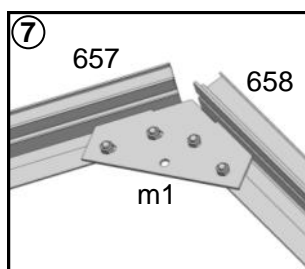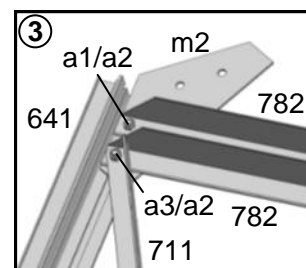

6










Side wall

Package No.3

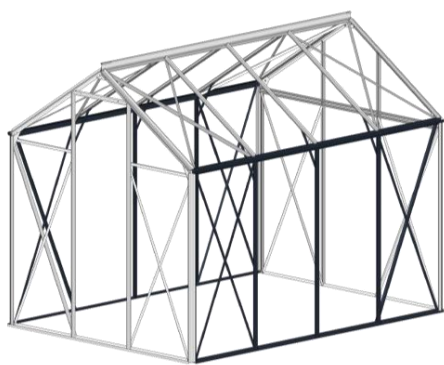

| # | 632 | 666 | 671 | 714 | 724 | 753 | a1 | a2 |
|-----------|------|------|------|------|------|-----|-------|----|
| mm | 2802 | 1535 | 2802 | 1674 | 1674 | 400 | M6x10 | M6 |
| Titan 709 | 2 | 6 | 2 | 4 | 4 | 6 | 44 | 44 |

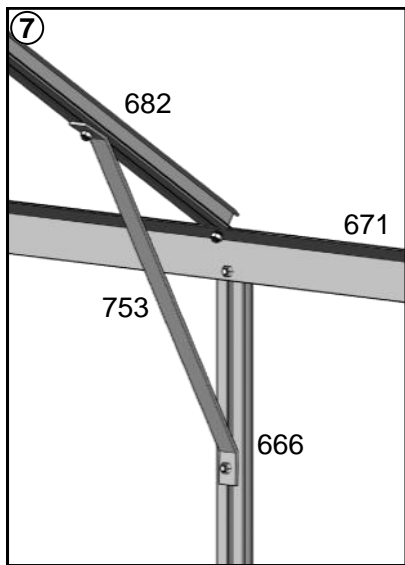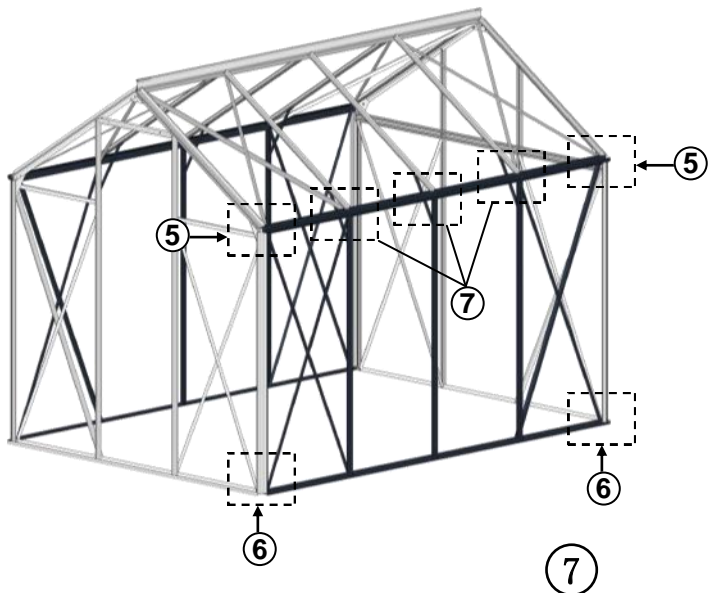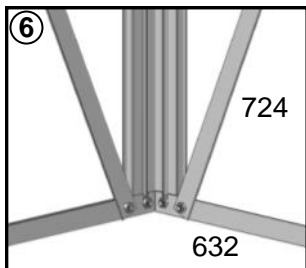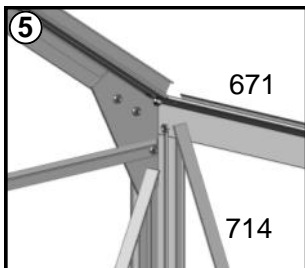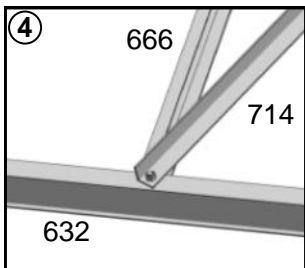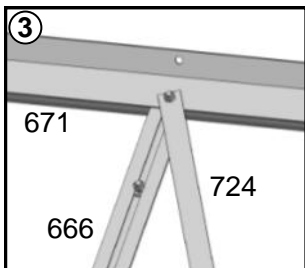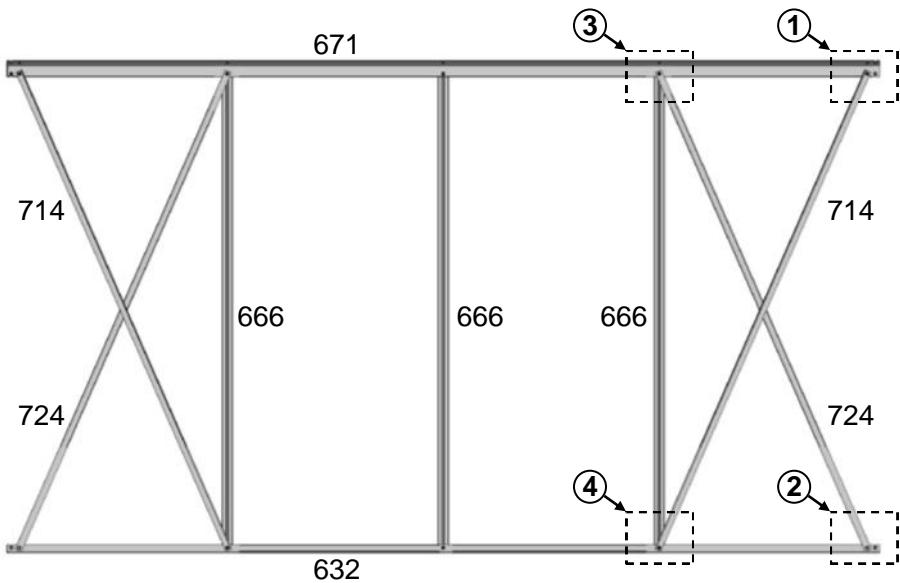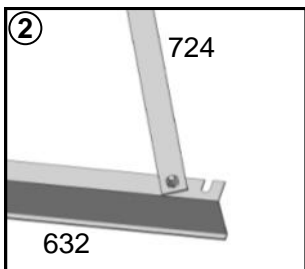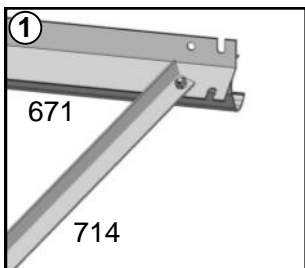





③ Preload an extra bolt into 666 before assembly.
Used for eave braces later.












Roof

Package No.4

All 682 profiles should be preloaded with 2 bolts
ie: all 682 profiles should have 2 free bolts once
the eave and ridge have been attached. These
bolts will be used to connect the eave brace. Vent
parts 521 also need these bolts.

| | | | | | | |
|-----------|--|---|---|---|---|---|
| 4 |  |  |  |  |  |  |
| # | 682 | 701 | 715 | 725 | a1 | a2 |
| mm | 1198 | 2802 | 1374 | 1374 | M6x10 | M6 |
| Titan 709 | 6 | 1 | 4 | 4 | 24 | 24 |

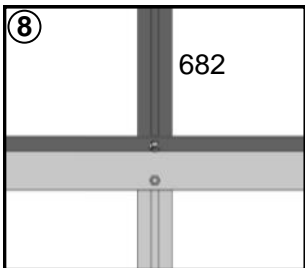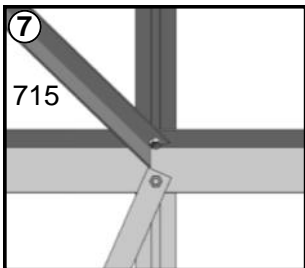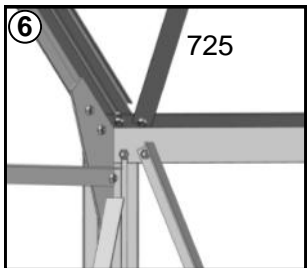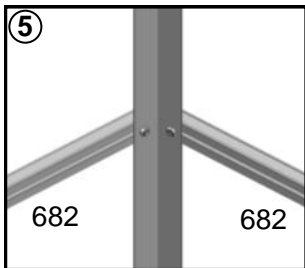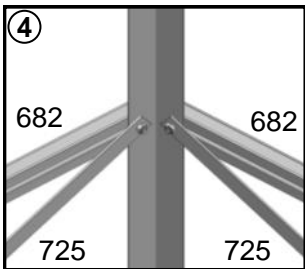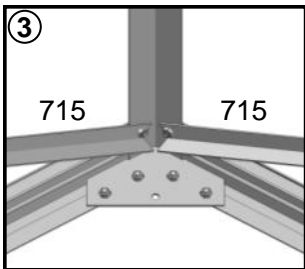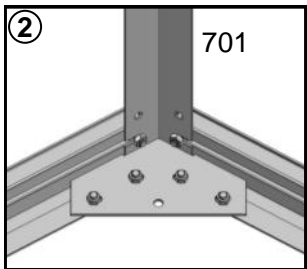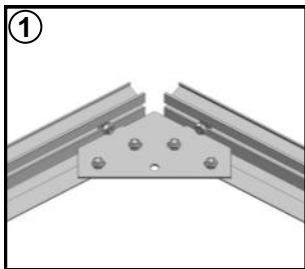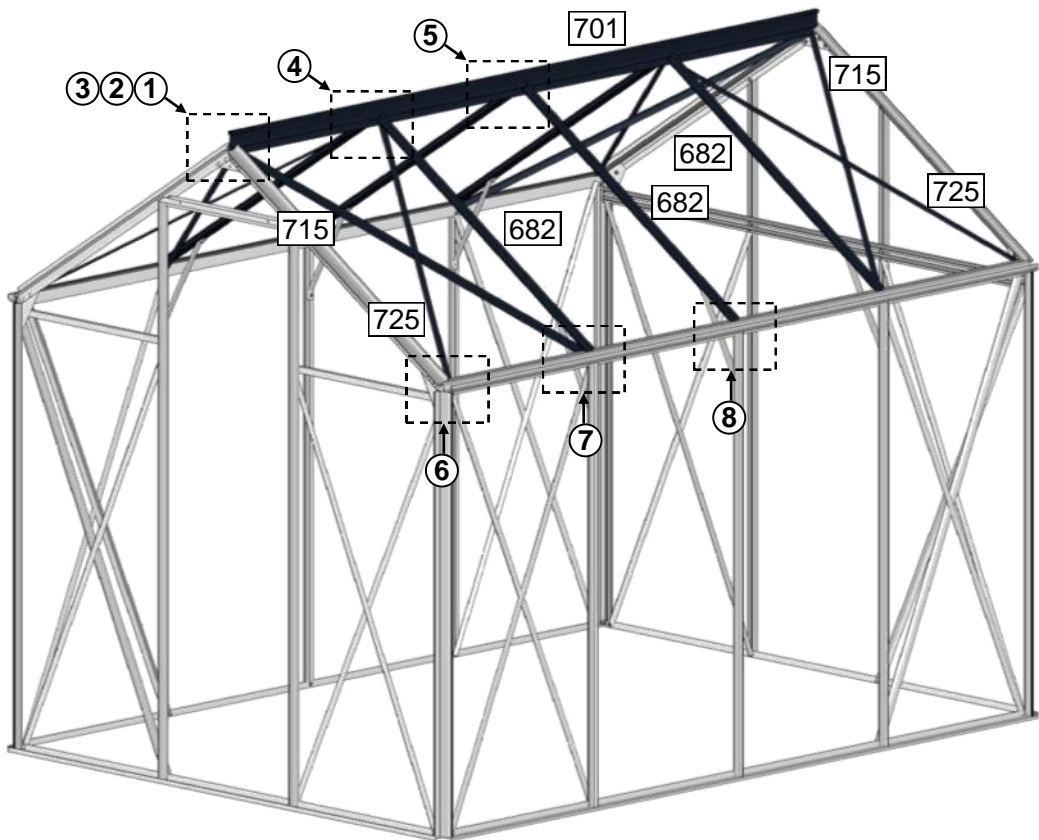

Vent

(Build the vent around polycarbonate sheet B7. B7 is inserted into the rebated vent frame. No glue required)

Package No.6

| 6 | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-------|----|------|----|----------|----|-----|
| # | 201 | 521 | 531 | 541 | 551 | a1 | a2 | a7 | a9 | a4 | p3 | p10 |
| mm | 300 | 724 | 601 | 707 | 678 | M6x10 | M6 | M4x8 | M4 | Φ4.2x9.5 | - | 40 |
| QTY | 1 | 1 | 2 | 1 | 1 | 8 | 8 | 2 | 2 | 2 | 2 | 1 |

Vent No. 2

Notes on vent assembly

No silicone is used on the vent polycarbonate.

1. Fit either 201 or an autovent, if you purchased one (see picture below), to 551 using the bracket & screws supplied. Fig 3/8

2. Fit the vent sides 531 to the vent hinge 541.



3. Slide in b7 (correct side to sun) and attach 551 to the sides 531

4. Repeat the procedure for the other vents.

5. Slide in the vents before you glaze the greenhouse. Fig 4










6. Before you slide in a vent, slide in one p3/a4. One of these needs to be positioned on both sides of a vent to stop it sliding sideways. Fig 6, 7

7. When the vent is in position and opens and shuts nip up a4 so p3 remains in position. Do this before you glaze the roof otherwise you will not be able to tighten a4 later.

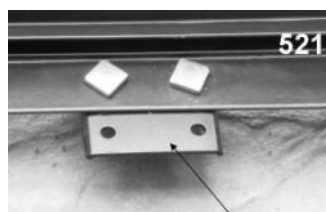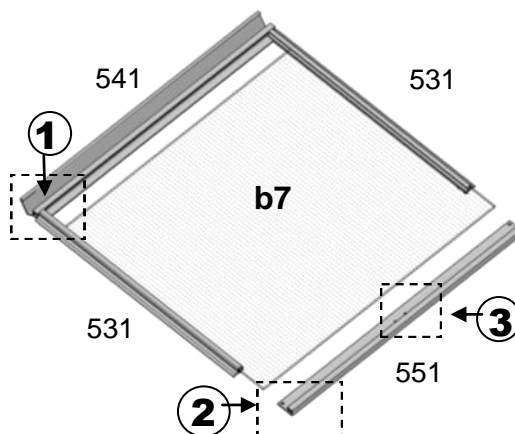

Autovent bracket

The autovent fitted with 6mm bolts **before** the greenhouse is glazed to the sill 521. This picture is looking from the outside so this will be hidden by polycarbonate.

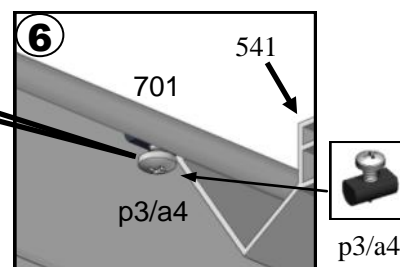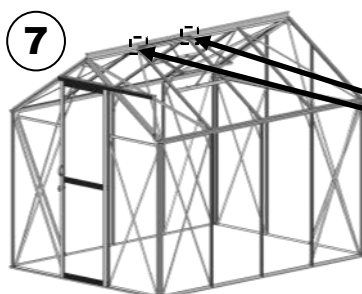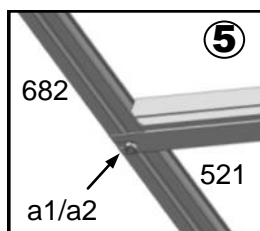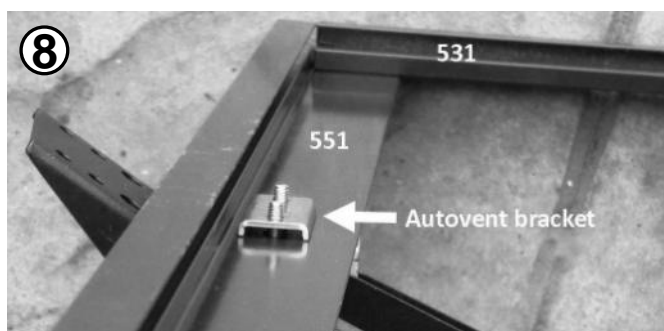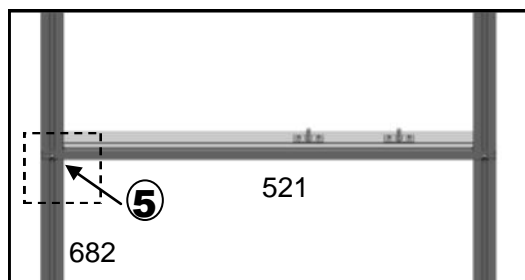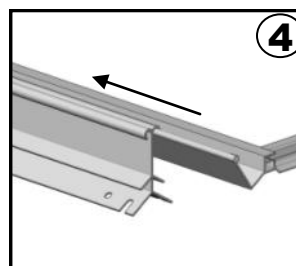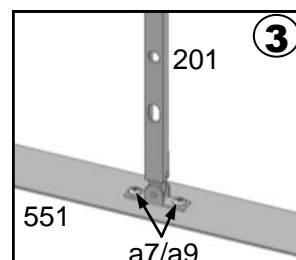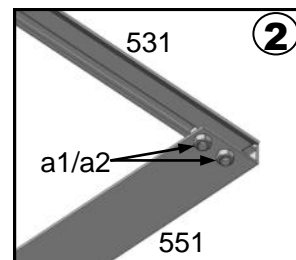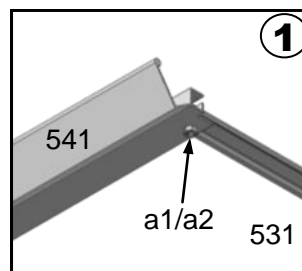




















9

Door







(Tip: Grease the self-tapping screws before you screw them in)

Package No.5

| 5 |  |  |  |  |  |  |  |  |  |  |  |  |  |
|------|---|---|---|---|---|---|---|---|---|---|---|---|---|
| # | 571 | 581 | 582 | 583 | 591 | 592 | 791 | 594 | 384 | p4 | p5 | m10 | n1 |
| Size | 1235 | 623 | 633 | 633 | 1967 | 1967 | 406 | 903 | - | - | - | - | - |
| QTY | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 4 | 1 | 2 | 2 | 2 | 4 |

| |  |  |  |  |  |  |
|------|---|---|---|---|---|---|
| # | a1 | a2 | a5 | a6 | a9 | a11 |
| Size | M6x10 | M6 | Φ3.5x19 | Φ3.5x25 | M4 | M4x25 |
| QTY | 7 | 7 | 12 | 4 | 2 | 2 |


P4 has slots. When attaching p4 leave it flush with 591 & 592 until you have put the door on the top runner 592. P4 is used to hold the bottom of the door in position (next page).

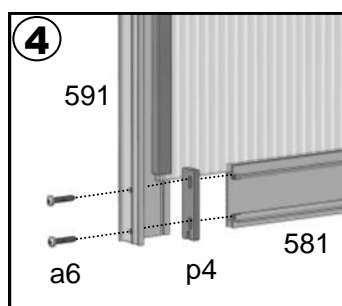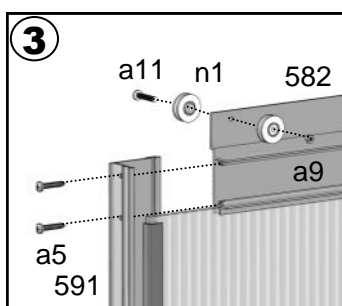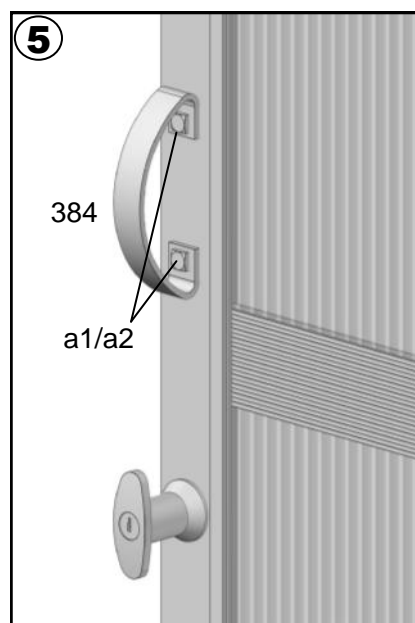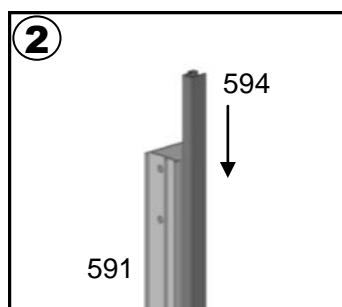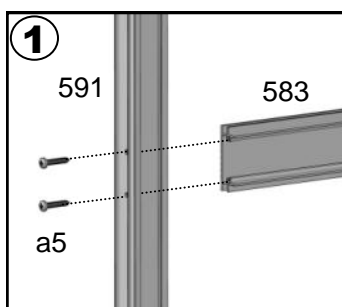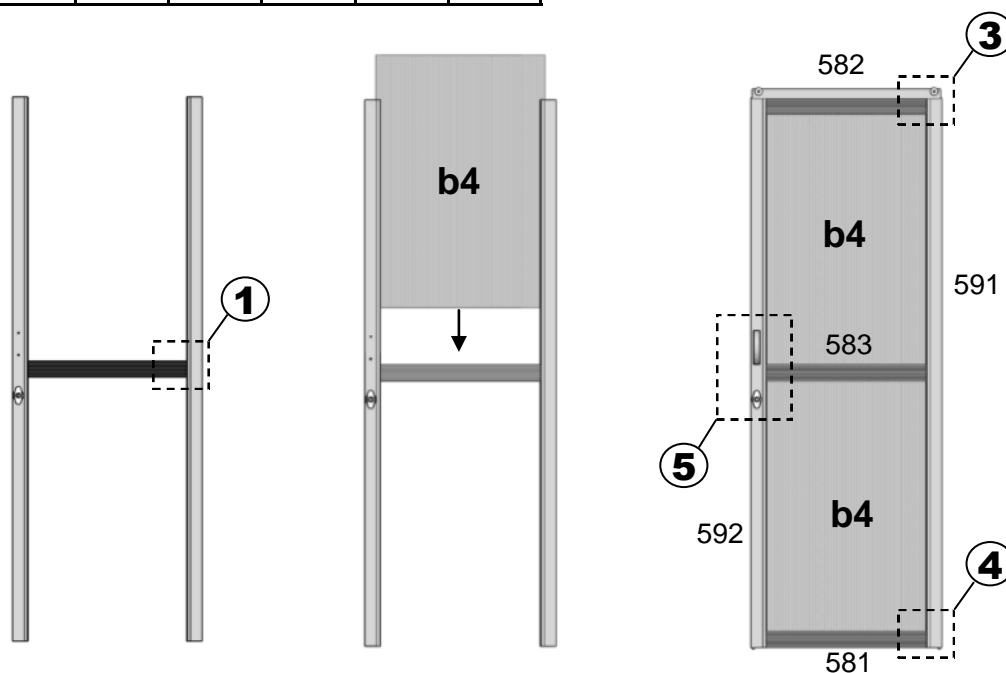










Door

Use grease on the self tapping screws so they go in easier
No silicone glue is required on the door polycarbonate





Package No.5

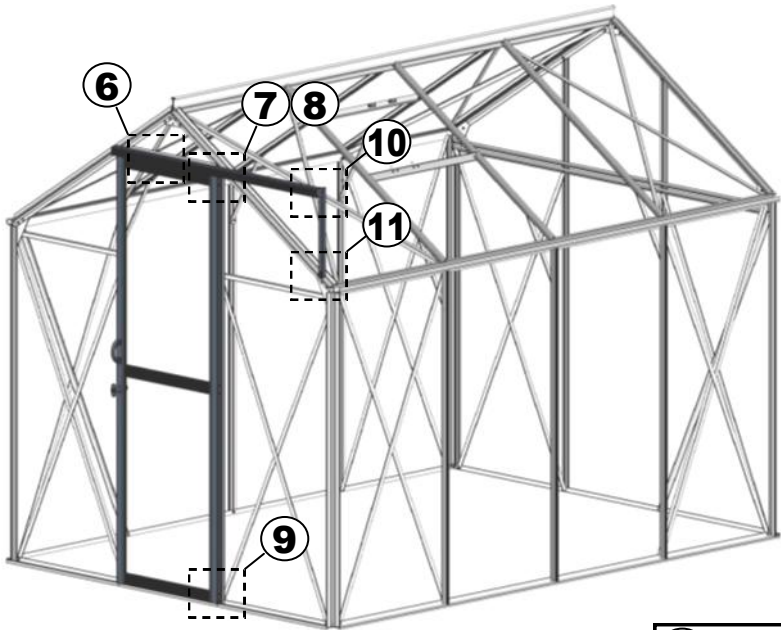

Slide the door rollers into the top rail 571, fig7. To get past the frame upright 664 gently pull the bottom of the door out so it clears it. Having 622 slightly loose helps. Close the doors and slide p4 down until it engages the bottom runner 633. Fig 9

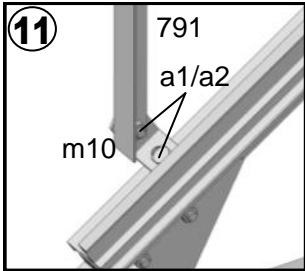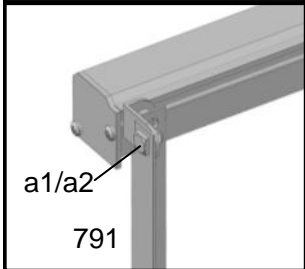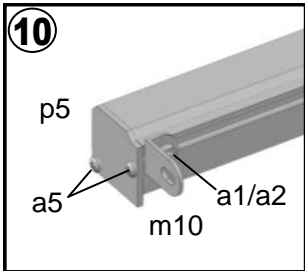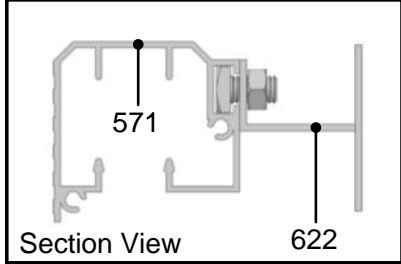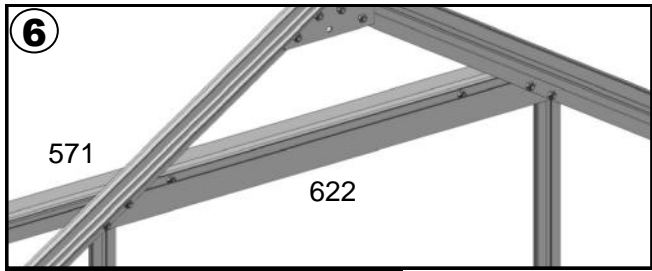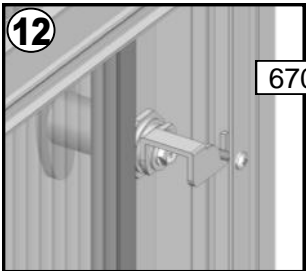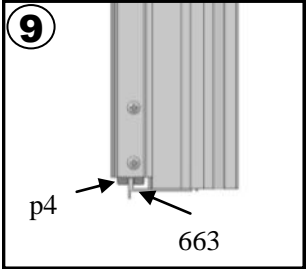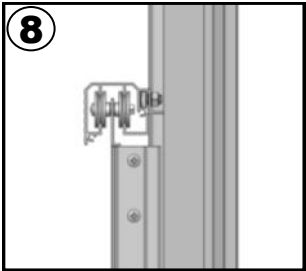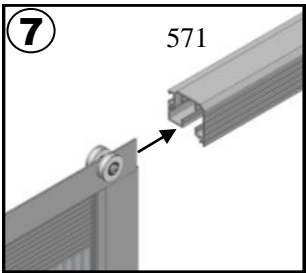


| | | | | | | |
|----|----|----|----------|-----|---------|----|
| | | | | | | |
| # | P8 | P9 | P0 | P1 | P2 | m0 |
| mm | | | Φ36x1000 | Φ40 | Φ36x200 | |
| | 2 | 2 | 2 | 2 | 2 | 2 |

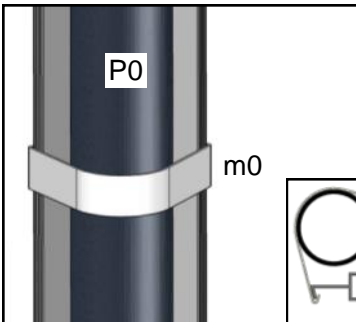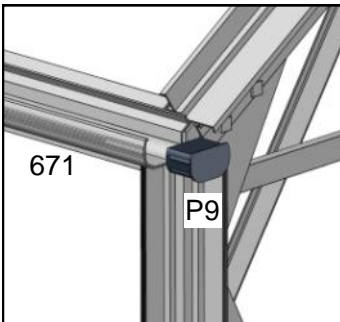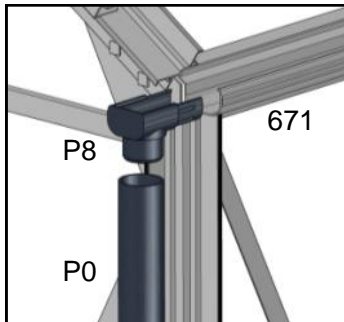


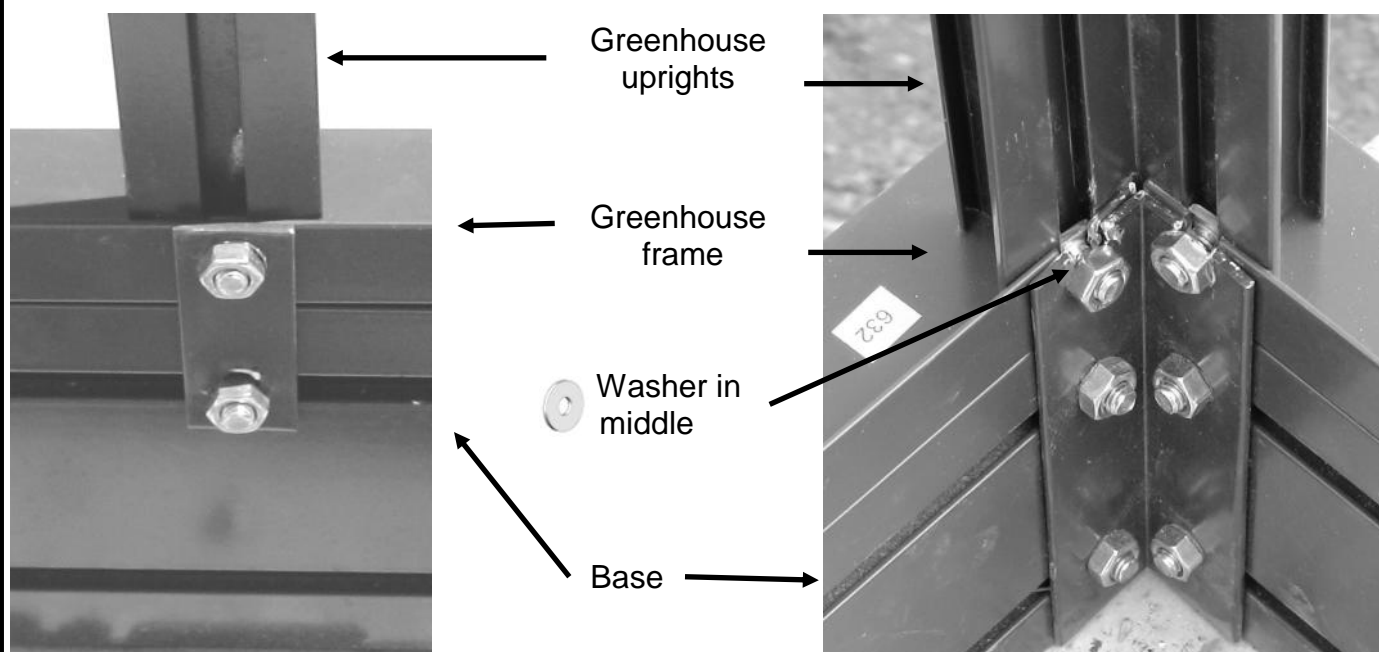
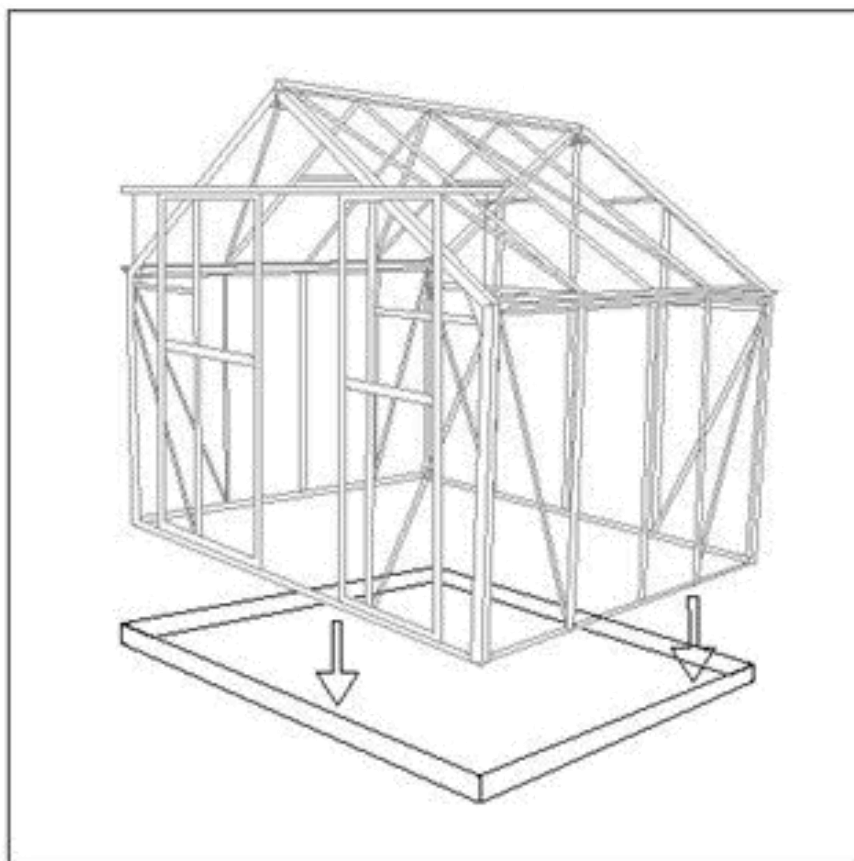
Base

The frame, once completed and prior to glazing with polycarbonate, can now be lifted onto the base. Only do this if the concrete has set. With a helper on each corner the greenhouse can be easily lifted into place. Secure the frame immediately to the base while the helpers hold the greenhouse frame. Once the frame is secured you are free to glaze at any time.

Glazing could take up to a day to complete so choose a day where it is going to be virtually windless and rain free. The silicone glue requires time to set and disturbing the panels during this time can weaken the bond. Try to complete all the glazing in one session, as a partially finished greenhouse is vulnerable to the wind.


| | |
|----------|---|
| |  |
| # | m7 |
| Titan 79 | 13 |


↑
This part is only used if you have made your own base.



Securing the greenhouse frame to the base.


Polycarbonate sheets

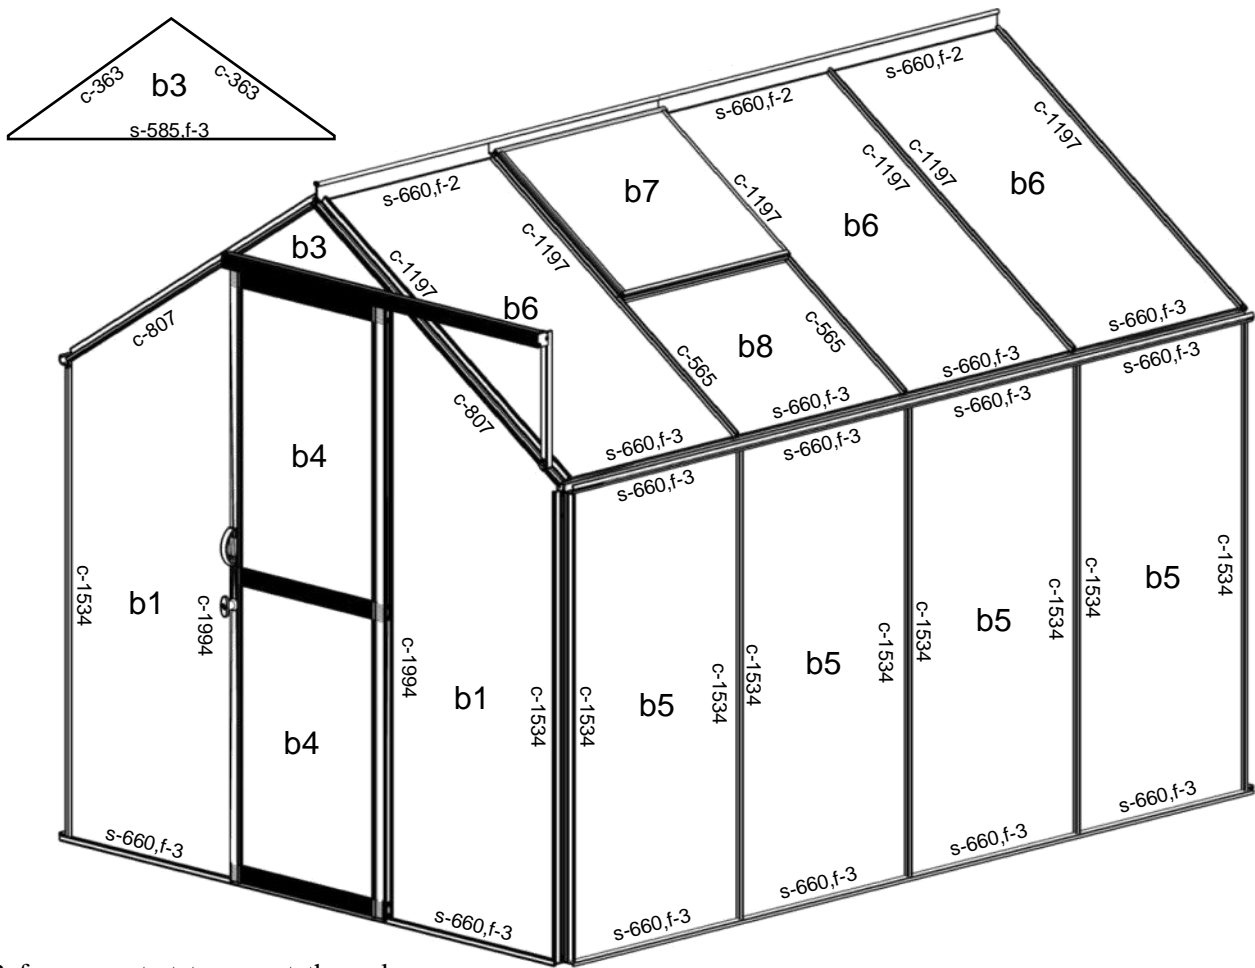

Before you start to mount the polycarbonate make sure the frame is square. All the criss-cross braces should be tight so adjust the frame until they are. It is easiest to fit the polycarbonate to the roof first because you can put a leg of a ladder through the unclad sides for extra stability if required. **Have you fitted the roof vents so they can't slip sideways (page 9)**

Use silicone glue under the areas where the PVC locking strips are going to be placed, ie: under all the vertical long sections. Mark one side of the polycarbonate with a felt tip pen so you know which side is to the sun. Once you take the protective covering off it is impossible to tell. The side that has the printed protective cover sheet goes to the sun.

IF YOU ARE IN A HIGH WIND AREA YOU MAY LIKE TO CONSIDER ADOS MS HIGH PERFORMANCE ADHESIVE SEALANT WHICH IS STRONGER THAN THE SEALER SUPPLIED

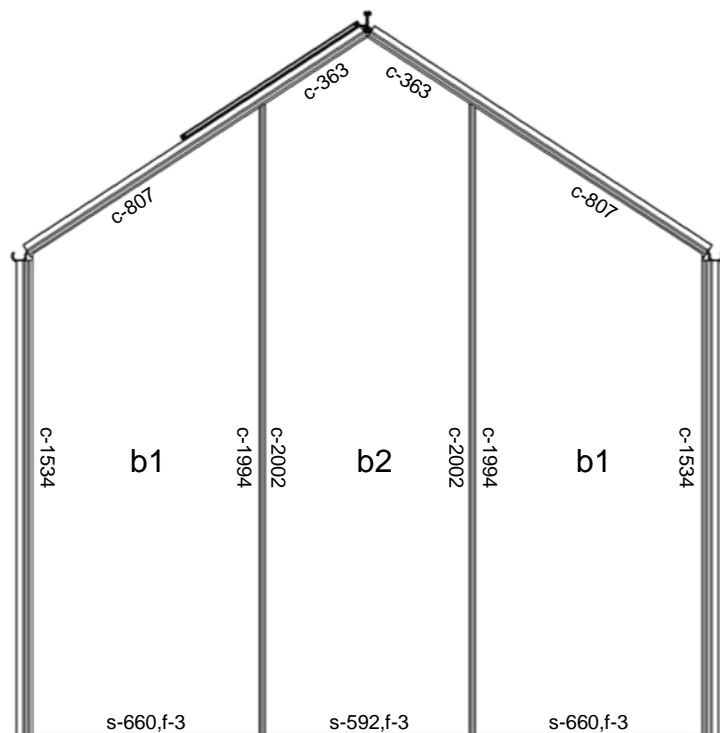


Installing the polycarbonate sheet (see page 16 for extra information)


| # | mm | Titan 79 |
|----|--------------------|----------|
| b1 | 677x1553/1991 | 4 |
| b2 | 609x2002/2200/2002 | 1 |
| b3 | 609x4/204/4 | 1 |
| b4 | 572x915 | 2 |
| b5 | 677x1528 | 8 |
| b6 | 677x1200 | 6 |
| b7 | 677x612 | 2 |
| b8 | 677x570 | 2 |

PVC capping bars (U shaped) are put over the ends of the sheet (top and bottom) to stop moisture and bugs from getting into the twin wall portions of the polycarbonate. Capping bars have the part number “s” and come in various lengths. In some places the shape of the extrusions are designed to cap it for you, so it does not apply in every case. Doors and vents for instance. A capping bar will not fit into an extrusion if it is not meant to, so it is self evident.


Assemble b1&b2 Panel

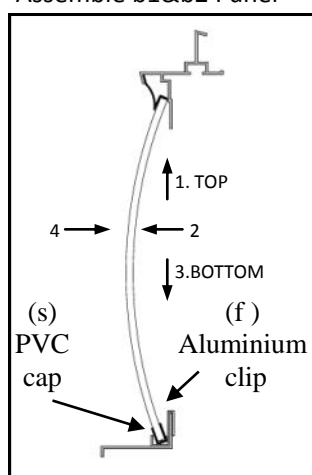


Assemble b5 Panel

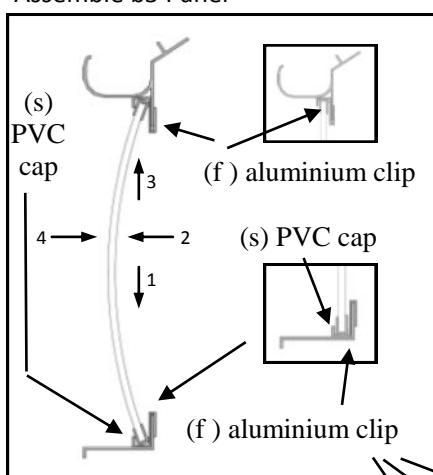

5.SIDE

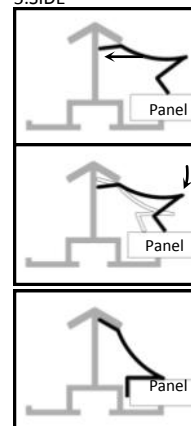

Fitting PVC locking strip (c)

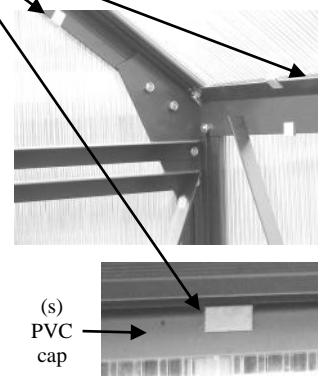


(f) from outside

| | | DWG | Length | Titan 79 | | | DWG | Length | Titan 79 |
|-------------|---|-----|--------|----------|------------|---|-----|--------|----------|
| Front Gable | c | | 1534 | 2 | Rear Gable | c | | 1534 | 2 |
| | | | 1994 | 2 | | | | 1994 | 2 |
| | | | 363 | 2 | | | | 2002 | 2 |
| | | | 807 | 2 | | | | 363 | 2 |
| | s | | 585 | 1 | | s | | 807 | 2 |
| | | | 660 | 2 | | | | 592 | 1 |
| Roof | f | | 12 | 9 | f | | | 660 | 2 |
| | c | | 565 | 4 | Side wall | c | | 12 | 9 |
| | | | 1197 | 12 | | | | 1534 | 16 |
| | s | | 660 | 14 | | s | | 660 | 16 |
| | f | | 12 | 24 | | f | | 12 | 48 |
| | | | | | | | | | |

Installing the polycarbonate.

- Only neutral silicone is to be used for mounting polycarbonate. Silicone is used between the frame and polycarbonate on the vertical parts of the roof and walls. The very low weight of polycarbonate requires you to press the sheets firmly into the silicone to ensure a good glue line. The polycarbonate sheets should be secured with the PVC locking strips (c) or spring clips. PVC locking strips have the better wind resistance.
- The polycarbonate is delivered with both ends open. Use the PVC capping bars (s) to seal off the ends in most cases.
- The polycarbonate is treated with UV protection and must therefore be positioned with the text side out. Remove the plastic protective film from both sides. Mark one side with a felt pen so you don't get confused.
- If you need more silicone glue use SIKA "Fix it Fast" sealer. For high wind areas ADOS MS High performance adhesive sealant is the best choice. A bit more expensive than SIKA, but a lot stronger. Available from Mitre 10 Mega etc.
- Polycarbonate sheets must not come into contact with the ground to prevent ingress of dirt and moisture between the walls. Always rest them on cardboard or similar material during construction.
- Important: The polycarbonate greenhouse should be protected against strong winds until the silicone has completely set.

Polycarbonate sheet

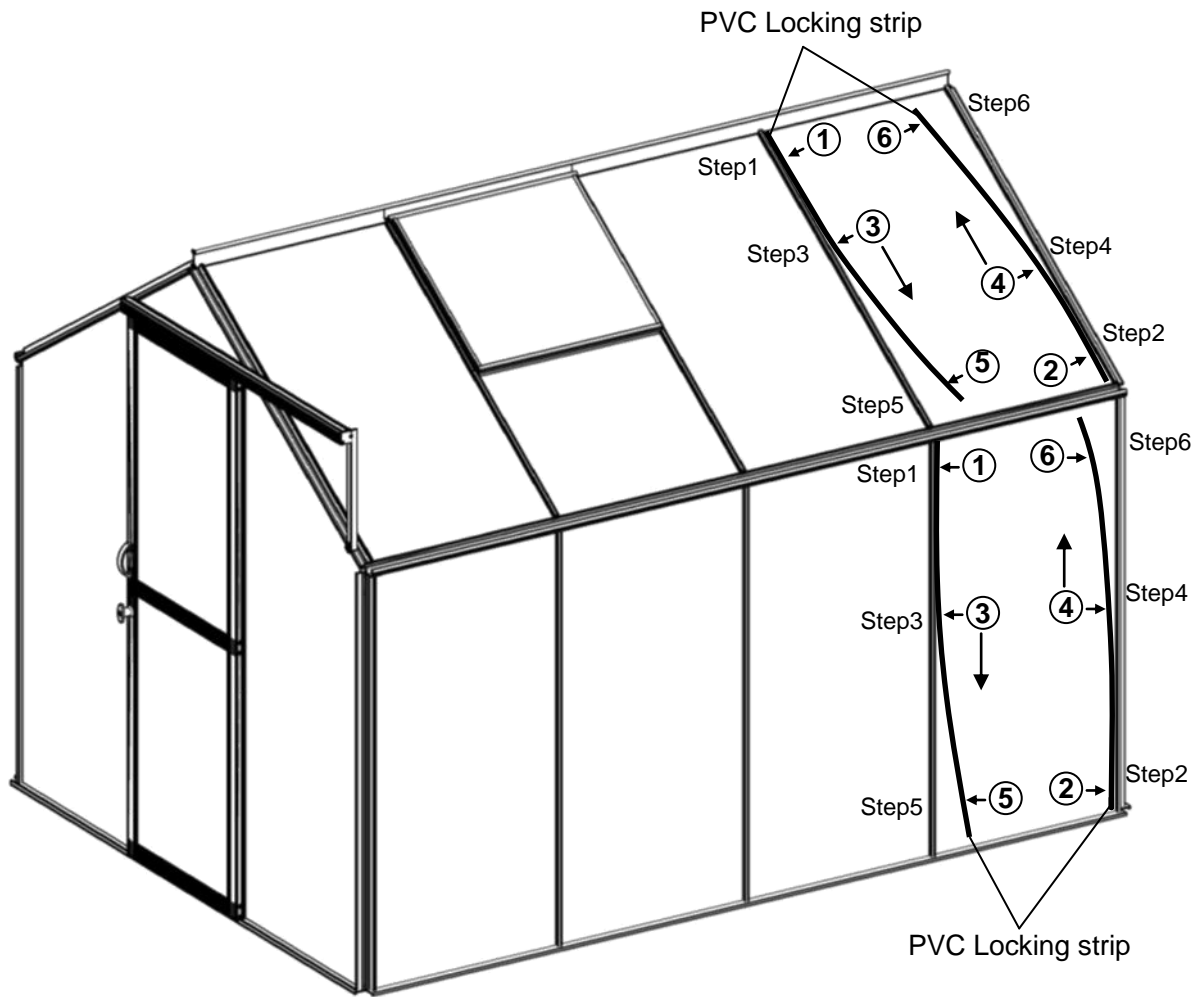

Note:

PVC locking strips are pushed into place from the top and the bottom in a diagonal direction, bit by bit, so the PVC locking strips are fitted evenly. If you fully insert the PVC locking strips from one side only, the polycarbonate panel may move sideways making it very difficult to insert the PVC locking strip to the other side.

Do a trial run before you the sealer on one sheet, so you get the hang of it. This avoids a mess if you have to pull it out again. Page 16 shows you how to insert the pvc locking strips. Easy once you know how.

As mentioned before. If you are in a high wind area you might like to consider using ADOS MS high performance adhesive sealant instead of the sealer supplied. Not cheap, but this stuff really sticks. Available from Mitre 10, Bunnings etc.

Installing the polycarbonate sheet

Inserting PVC locking strips.

W clips and PVC locking strips are supplied with the greenhouse. PVC locking strips are far superior to W clips in the wind so we recommend you use them. W clips have just been left in the kits to be used in case you are short shipped PVC locking strips. They will do the job temporarily until you receive extra PVC locking strips. The strips go in quite easily once you know how. A few pictures are shown below to make this process a little clearer. Run a bead of glue/sealer down the vertical parts of the frame. Twang the polycarbonate (see page 14) in top and bottom by bending it slightly and then push it against the frame. Secure with the PVC locking strips.



Please note. The doors and vents have polycarbonate inserted into them as they are built. With the rest of the greenhouse polycarbonate is put in after the frame is built.

